
 <b>UTILITY PATENT APPLICATION TRANSMITTAL</b> <small>(Special for new nonprovisional applications under 37 CFR 1.53(b))</small>	Attorney Docket No.	197193US2	
	First Inventor or Application Identifier	Wataru NARA	
	Title	IMAGE READING-OUT APPARATUS, COPYING MACHINE AND FACSIMILE DEVICE UTILIZING THE SAME, AND METHOD OF READING OUT IMAGE	

<b>APPLICATION ELEMENTS</b> <i>See MPEP chapter 600 concerning utility patent application contents</i>	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
<p>1. <input checked="" type="checkbox"/> Fee Transmittal Form (e.g. PTO/SB/17)                          (Submit an original and a duplicate for fee processing)</p> <p>2. <input checked="" type="checkbox"/> Specification                          Total Pages <span style="border: 1px solid black; padding: 2px 10px;"><b>47</b></span></p> <p>3. <input checked="" type="checkbox"/> Formal Drawing(s) (35 U.S.C. 113)                          Total Sheets <span style="border: 1px solid black; padding: 2px 10px;"><b>5</b></span></p> <p>4. <input type="checkbox"/> Oath or Declaration                          Total Pages <span style="border: 1px solid black; padding: 2px 10px;"></span></p> <p style="margin-left: 20px;">a. <input type="checkbox"/> Newly executed (original or copy)</p> <p style="margin-left: 20px;">b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. §1.63(d))                          (for continuation/divisional with box 15 completed)</p> <p style="margin-left: 40px;">i. <input type="checkbox"/> DELETION OF INVENTOR(S)                          Signed statement attached deleting inventor(s) named                          in the prior application, see 37 C.F.R. §1.63(d)(2) and                          1.33(b).</p> <p>5. <input type="checkbox"/> Incorporation By Reference (usable if box 4B is checked)                          The entire disclosure of the prior application, from which a copy of the                          oath or declaration is supplied under Box 4B, is considered to be part                          of the disclosure of the accompanying application and is hereby                          incorporated by reference therein.</p>	<p style="text-align: center;"><b>ACCOMPANYING APPLICATION PARTS</b></p> <p>6. <input type="checkbox"/> Assignment Papers (cover sheet &amp; document(s))</p> <p>7. <input type="checkbox"/> 37 C.F.R. §3.73(b) Statement     <input type="checkbox"/> Power of Attorney                          (when there is an assignee)</p> <p>8. <input type="checkbox"/> English Translation Document (if applicable)</p> <p>9. <input type="checkbox"/> Information Disclosure     <input type="checkbox"/> Copies of IDS                          Statement (IDS)/PTO-1449       Citations</p> <p>10. <input type="checkbox"/> Preliminary Amendment</p> <p>11. <input checked="" type="checkbox"/> White Advance Serial No. Postcard</p> <p>12. <input type="checkbox"/> Small Entity     Statement filed in prior                          Statement(s)       application. Status still proper                                                       and desired.</p> <p>13. <input type="checkbox"/> Certified Copy of Priority Document(s)                          (if foreign priority is claimed)</p> <p>14. <input checked="" type="checkbox"/> Other:           Request for Priority                                               List of Inventors' Names and                                               Addresses</p>

15. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below:

☐ Continuation      ☐ Divisional      ☐ Continuation-in-part (CIP)      of prior application no.:  
Prior application information:      Examiner:      Group Art Unit:

16. Amend the specification by inserting before the first line the sentence:

☐ This application is a ☐ Continuation ☐ Division ☐ Continuation-in-part (CIP)  
of application Serial No. \_\_\_\_\_ Filed on \_\_\_\_\_

☐ This application claims priority of provisional application Serial No. \_\_\_\_\_ Filed \_\_\_\_\_

17. CORRESPONDENCE ADDRESS



**22850**  
(703) 413-3000  
FACSIMILE: (703) 413-2220

Name:	Gregory J. Maier	Registration No.:	25,599
Signature:	<i>Eckhard H. Kuesters</i>	Date:	9-14-02
Name:	Eckhard H. Kuesters Registration No. 28,870	Name:	Eckhard H. Kuesters Registration No. 28,870

Docket No. 197193US2

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

INVENTOR(S) Wataru NARA

SERIAL NO: New Application

FILING DATE: Herewith

FOR: IMAGE READING-OUT APPARATUS, COPYING MACHINE AND FACSIMILE DEVICE  
UTILIZING THE SAME, AND METHOD OF READING OUT IMAGE

jc917 U.S. PTO  
09/662173  
09/14/00

FEE TRANSMITTAL

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20311

FOR	NUMBER FILED	NUMBER EXTRA	RATE	CALCULATIONS
TOTAL CLAIMS	34 - 20 =	14	× \$18 =	\$252.00
INDEPENDENT CLAIMS	9 - 3 =	6	× \$78 =	\$468.00
<input type="checkbox"/> MULTIPLE DEPENDENT CLAIMS (If applicable)			+ \$260 =	\$0.00
<input checked="" type="checkbox"/> LATE FILING OF DECLARATION			+ \$130 =	\$130.00
BASIC FEE				\$690.00
TOTAL OF ABOVE CALCULATIONS				\$1,540.00
<input type="checkbox"/> REDUCTION BY 50% FOR FILING BY SMALL ENTITY				\$0.00
<input type="checkbox"/> FILING IN NON-ENGLISH LANGUAGE			+ \$130 =	\$0.00
<input type="checkbox"/> RECORDATION OF ASSIGNMENT			+ \$40 =	\$0.00
TOTAL				\$1,540.00

09/14/00 15:00

- ☐ Please charge Deposit Account No. 15-0030 in the amount of \_\_\_\_\_ A duplicate copy of this sheet is enclosed.
- ☒ A check in the amount of \$1,540.00 to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge any additional fees which may be required for the papers being filed herewith and for which no check is enclosed herewith, or credit any overpayment to Deposit Account No. 15-0030. A duplicate copy of this sheet is enclosed.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.

*Eckhard H. Kuesters*

Gregory J. Maier

Registration No. 25,599

Eckhard H. Kuesters

Registration No. 28,870

Date: 9/14/00



22850

Tel. (703) 413-3000  
Fax. (703) 413-2220  
(OSMMN 11/98)



in accordance with the light receiving amount from the CCD  
and another signal component changing in accordance with the  
same. Since the signal component effective for the image  
processing is only the signal component changing in  
5 accordance with the light receiving amount of the CCD, the  
black-shading compensation is performed by subtracting the  
signal component of the dark current (black level value) from  
the image data outputted by the CCD.

10 The black level value can be obtained line by line in  
average the output of the optical black (OPB) portion  
provided in a part of the CCD (tip end portion in the main  
scanning direction), for instance, before reading out the  
original document by use of the CCD. Moreover, the OPB  
portion in the CCD is, for instance, the part in which the  
15 surface of only the several pieces of pixels at the side of  
starting the scan in the main scanning direction, for  
instance, among the pixels of the optoelectric conversion  
elements arranged in a row of the CCD is vaporized with  
aluminum, and thereby the black level value can be obtained.

20 However, the background level of the original document  
is detected from the image data outputted from the CCD and  
the image data are changed in accordance with the background  
level of the original document on which the reference voltage  
of the analog-to-digital (A/D) converter at the time of the  
25 A/D conversion, and thereby the following of the black

standard level detection at the black-shading compensation is delayed and the unevenness of the density occurs in the image in the case of adopting the member of removing the influence exerted on the background color of the original document from the image data. This is the troublesome matter to be solved.

Furthermore, in the system required the real-time property to perform line by line the black-shading compensation, since the number of the pixels of the optoelectric element which can be used in the OPB portion is limited, the unevenness occurs in the average value of the black level value in the image reading-out apparatus of the unpreferable S/N ratio. As the result, since the black-shading compensation differs per each line, even though the black level lines exist successively in the sub-scanning direction, the black data level differs per each line on the read-out image data and thereby the transverse stripe occurs on the image. This is also the troublesome matter to be solved.

One of the methods of solving the above matter is to improve the aforementioned S/N ratio. However, it is very difficult in consideration of the cost and technical matters. It can be thought to adopt the other method of eliminating the real time property to perform line by line the black-shading compensation as mentioned before. However, according to this method, the system employed hitherto has to be

largely changed.

Heretofore, the background arts regarding the image reading-out apparatus and the copying machine and facsimile device both including the image reading-out apparatus have been described. However, according to such background arts, there exists no advantageous functional effect for improving the image reading-out apparatus.

#### SUMMARY OF THE INVENTION

According to the present invention, high quality of the image can be realized, by performing the processing corresponding to the sorts of the image processing after the black-shading compensation. Furthermore, the occurrence of the transverse stripe of the image can be prevented, and the occurrence of the density unevenness of the image can be also prevented. Thereby, the high quality of the image can be realized. Moreover, when the image processing of amplifying the comparative influence of the image data noise is performed, when the image processing not apt to be affected comparatively by the image data noise is performed, when the MTF compensation is performed, and when the smoothing processing is performed, the high quality of the image can be realized.

In the first aspect of the invention, an image reading-out apparatus for exposing and scanning an original document

to read out the image on the original document and thereby  
obtaining image data includes: a background level detecting  
circuit for detecting the background level of the original  
document from the image data; an analog-to-digital converter  
5 for removing an influence due to the color of the background  
on the original document from the image data and performing  
the analog-to-digital conversion of the image data in  
accordance with the detected background level; and a black-  
shading compensation circuit for performing black-shading  
10 compensation of the image data after the analog-to-digital  
conversion.

The black-shading compensation circuit includes: plural  
black level values calculating circuits for respectively  
obtaining, per each one line, black level values employed for  
15 the black-shading compensation from the image data by use of  
respective different calculation members; a selection circuit  
for selecting and outputting one black level value among  
plural sorts of black level values outputted by the plural  
black level values calculating circuits; and a subtracter for  
20 subtracting the selected black level value from the image  
data after the analog-to-digital conversion and performing  
the black-shading compensation.

In such structure, it is possible to select the optimum  
one among the plural black level values obtained by the  
25 different members and perform the black-shading compensation.

In the second aspect of the invention, the image reading-out apparatus in connection with the first aspect further includes a control member for performing the selection for the image data by use of the selection circuit  
5 in accordance with the sorts of the processing performed at the stage subsequent to that of the black-shading compensation circuit.

In such structure, it is possible to select the optimum one among the plural black level values in accordance with  
10 the sorts of the image processing performed after the black-shading compensation.

In the image reading-out apparatus of the third aspect in connection with the second aspect, one of the plural black level values calculating circuits is the first calculation  
15 circuit for calculating the black level value on the basis of the image data per one line inputted this time and the image data per one or plural lines inputted until last time; and another one of the plural black level values calculating circuits is the second calculation circuit for calculating  
20 the black level value only on the basis of the image data per one line inputted this time.

In such structure, by using the black level value calculated on the basis of the image data of one line inputted this time and the image data of one or plural lines  
25 inputted until last time, the occurrence of the transverse



stripe on the image can be easily prevented with low cost.  
Furthermore, by using the black level value calculated on the basis of only the image data of one line inputted this time, the occurrence of the density unevenness can be suppressed.

5 In the image reading-out apparatus of the fourth aspect in connection with the third aspect, the sorts of processings performed at the stage subsequent to that of the black-shading compensation circuit include first processing and second processing; the first processing is a processing of  
10 amplifying the influence exerted by the noise on the image data to a larger extent than the second processing; the second processing is a processing of being less apt to be affected by the noise than the first processing; in the case of performing the first processing, the control member causes  
15 the black level from the first calculation circuit to be outputted from the selection circuit; and in the case of performing the second processing, the control member causes the black level from the second calculation circuit to be outputted from the selection circuit.

20 In such structure, when the image processing of amplifying the comparative influence of the noise of the image data, the occurrence of the transverse stripe of the image can be simply prevented with low cost. Furthermore, when the image processing not apt to be comparatively  
25 affected by the noise of the image data is performed, the

occurrence of the density unevenness of the image can be suppressed.

In the image reading-out apparatus of the fifth aspect in connection with the fourth aspect, the first processing is  
5 an MTF compensation.

Consequently, when the MTF compensation of amplifying the comparative influence of the noise of the image data is performed, the occurrence of the transverse stripe of the image can be easily prevented with low cost.

10 In the image reading-out apparatus in connection with fourth or fifth aspect, the second processing is a smoothing processing.

Consequently, when the smoothing processing not apt to be comparatively affected by the noise of the image data, the  
15 occurrence of the density unevenness of the image can be suppressed.

The copying machine of the seventh aspect of the invention is provided with an image reading-out apparatus in connection with either one of the first through sixth  
20 aspects; and an image forming apparatus for forming an image on the basis of the image data obtained by the image reading-out apparatus.

Consequently, in the copying machine, it is possible to attain the same functional effect as that described in either  
25 one of the first through sixth aspects.

The facsimile device of the eighth aspect of the invention is provided with an image reading-out apparatus in connection with either one of the first through sixth aspects; a transmitting/receiving apparatus for transmitting the image data obtained by the image reading-out apparatus to a network and receiving the image data from the network; and an image forming apparatus for forming the image on the basis of the image data received by the transmitting/receiving apparatus.

Consequently, in the facsimile device, it is possible to attain the same functional effect as that described in either one of the first through sixth aspects.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

A more complete appreciation of the invention and many of the attendant advantages thereof will be readily obtained as the same becomes better understood by reference to the following detailed description when considered in connection with the accompanying drawings, wherein:

Fig. 1 is an outlined view illustrating the concept of the image reading-out apparatus according to the first embodiment of the present invention;

Fig. 2 is a block diagram illustrating the structure of the circuit on the sensor board of the image reading-out apparatus;

Fig. 3 is a block diagram illustrating the structure of the duplicate addition average value calculating circuit constructing the black-shading compensation circuit of the image reading-out apparatus;

Fig. 4 is a block diagram illustrating the outlined structure of the copying machine according to the second embodiment of the present invention;

Fig. 5 is a block diagram illustrating the outlined structure of the facsimile device according to the third embodiment of the present invention; and

Fig. 6 is a table showing an example of calculation in the duplicate addition average value calculating circuit.

#### **DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS**

In describing the preferred embodiments of the present invention illustrated in the drawings, specific terminology is employed for the sake of clarity. However, the present invention is not intended to be limited to the specific terminology so selected and it is to be understood that each specific element includes all technical equivalents which operate in a similar manner.

Referring now to the drawings; wherein like reference numerals designate identical or corresponding parts throughout the several views (diagrams), and more particularly to Figs. 1 through 6 thereof, there are

illustrated the improved image reading-out apparatus, and the copying machine and the facsimile device both employing the above image reading-out apparatus.

Fig. 1 illustrates the concept of the image reading-out apparatus according to the first embodiment of the present invention. On the upper surface portion of the housing of the image reading-out apparatus 1, there are provided a contact glass 3 for putting an original document 2 thereon and a white standard plate 4 for use in the white-shading compensation. The white standard plate 4 is an almost white member of a uniform density which is provided in the main scanning direction in order to obtain the compensation data at the time of the shading compensation. The original document 2 is pressed by a pressing plate not shown from the upper side so as not to float from the contact glass 3.

A light source 5 radiates the light at an angle toward the reading-out surface of the white standard plate 4 and the contact glass 3. The light reflected on the white standard plate 4 or the original document 2 is directed to an opto-electric conversion element CCD 10 as an incident light through three mirrors 6, 7, and 8 and a lens 9.

The light source 5 and the mirrors 6, 7, and 8 construct first and second moving bodies not shown. The distance between the reading-out surface of the original document 2 and the CCD 10 is kept constant by the driving of the motor

13, and the both moving bodies move in the sub-scanning direction. Thereby, the exposure and the scanning of the original document 2 is performed.

The CCD 10 outputs the voltage corresponding to the incident light amount (intensity) as the analog image data. The image data are treated with the predetermined processing of the A/D conversion, etc. by use of the circuit on the sensor board 11 on which the CCD 10 is provided, and thereafter, the image data thus treated are transferred to the image processing section 12 as the digital image signal.

Fig. 2 is a block diagram for illustrating the construction of the circuit on the sensor board 11. As shown in Fig. 2, the analog image data outputted from the CCD 10 are treated with the AGC (Automatic Gain Control) processing by an analog signal processing circuit 21. Thereafter, the analog image data are converted to the digital image data by the A/D converter 22.

On that occasion, the peak value of the image data after the AGC processing is detected by the background level detecting circuit, that is, a peak/hold (P/H) circuit 23, and held as the signal showing the background level of the original document 2 at that time. And then, the output voltage of the peak/hold circuit 23 is treated with the reference voltage of the A/D converter 22, and thereby, following the detection of the background level of the

original document 2, the influence exerted on the original document 2 due to the background color is removed from the image data. In such a way, the image data are converted to the digital data by the A/D converter 22.

5       The image data after the A/D conversion are treated with the black-shading compensation by use of the black-shading compensation circuit 24. (The detail thereof is described later.) The image data are further treated with the white-shading compensation by use of the white-shading compensation circuit 25. The image data thus compensated are outputted to  
10       the image processing section 12. Various image processings such as  $\gamma$ -compensation, color conversion, magnification/reduction treatment are performed in the image processing section 12.

15       The black-shading compensation circuit 24 is composed of an average value calculating circuit 26, a duplicate addition average value calculating circuit 27, a selection circuit 28, and a subtracter 29. The average value calculating circuit 26 and the duplicate addition average value calculating  
20       circuit 27 obtain the black level value employed for the black-shading compensation per one line of the image data with the respective different members, from the image data outputted by the A/D converter 22. The selection circuit 28 selectively outputs one of the black level value outputted by  
25       the average value calculating circuit 26 and the other black

level value outputted by the duplicate addition average value  
calculating circuit 27. The subtracter 29 subtracts the  
black level value outputted by the selection circuit 28 from  
the black level value outputted by the A/D converter 22, and  
5 thereby the black-shading compensation of the image data is  
performed.

The average value calculating circuit 26 is the black  
level value calculating circuit serving as the second circuit,  
and the circuit 26 outputs the black level value on the basis  
10 of only the image data of one line inputted this time.

To state concretely, for instance, the output of the OPB  
portion provided in a part of the CCD 10 (tip end portion in  
the main scanning direction) is cut out by the control signal  
OPB GATE outputted from the microcomputer 30 for controlling  
15 the entire portion of the image reading-out apparatus 1. The  
output of the OPB portion thus cut out can be obtained in  
average per one line. The above matter is same as that of  
the aforementioned background art.

The duplicate addition average value calculating circuit  
20 27 is the black level value calculating circuit serving as  
the first circuit, and the output of the average value  
calculating circuit 26 is inputted into the circuit 27. The  
black level value is calculated on the basis of the image  
data of one line inputted this time and the image data of one  
25 line inputted last time. To state concretely, for example,



the black level is calculated as follows:

$$D_{b,n} = D_{opb,n}/A + D_{b,n-1} \times (A-1)/A \cdots (1),$$

wherein  $D_{b,n}$  is a black level value of  $n$  lines,  $D_{opb,n}$  is an average value of OPB portion of  $n$  lines, and  $A$  is a constant (duplicate addition average coefficient). The black level value of  $n$  lines  $D_{b,n}$  can be obtained by performing the calculation of the above equation (1).

Here, assuming that the S/N ratio of the image reading-out apparatus 1 is bad (unpreferable) and the average value  $D_{opb,n}$  of the black level value per one line of the image data becomes uneven, the average value  $D_{opb,n}$  can be represented by the below equation (2).

$$D_{opb,n} = D_{b,n-1} + \alpha \cdots (2),$$

wherein  $\alpha$  is a variation component of the noise. By substituting the equation (1) by the equation (2), the following equation (3) can be obtained:

$$D_{opb,n} = D_{b,n-1} + \alpha/A \cdots (3)$$

In the duplicate addition average value calculating circuit 27, the duplicate addition averaging is performed on the basis of the equation (1). As the result of the above averaging, it may become apparent that the influence of the above-mentioned noise is reduced to  $1/A$  times. Namely, the output average value from the pixel of the OPB portion in the average value calculating circuit 26 is taken in the duplicate addition average value calculating circuit 27.

Regarding the obtained black level value of the line unit,  
the duplicate addition average is further taken between  
plural lines. Thereby, keeping the real time property of  
detecting the black level value per line, the variation of  
the average value  $D_{pb,n}$  of line unit outputted by the  
average value calculating circuit 26 can be suppressed and  
the influence of the noise contained in the image data can be  
also suppressed. Consequently, the transverse stripe does  
not appear on the image.

Here, since the image data do not include the data less  
than the decimal (fraction) point, it is necessary to  
prohibit the data outputted from the duplicate addition  
average value calculating circuit 27 as the black level value  
to have the data less than the decimal (fraction) point.  
Hereinafter, such treatment is called "totalizing treatment".

And then, assuming that the black level value before  
rounding to the nearest whole number is  $D'_{b,n}$ , the following  
equations (4) and (5) can be obtained:

$$D'_{b,n} = D_{b,n} + M_n \cdots (4)$$

$$M_n = \{D_{pb,n} + (D_{b,n-1} + M_{n-1}) \times (A-1)\} / A - D_{b,n} \cdots (5),$$

wherein  $M_n$  can be represented as the surplus obtained by the  
calculation of the  $n$ -lines  $D_{pb}$  of rounding to the nearest  
whole number.

Consequently, the duplicate addition averaging treatment  
of performing the totalizing treatment can be realized by

performing the calculation shown by the following equation

(6) as an example:

$$Db,n = \text{ROUND}[\{Dopb,n + (Db,n-1 + M_{n-1}) \times (A-1)\} / A] \cdots (6),$$

wherein ROUND [] signifies the calculation symbol for

5 performing the rounding to the nearest whole number for the number less than decimal fraction point.

In the equation (6), the black level value of the last-time (n-1) lines is added for the duplicate addition

"(Db,n-1 + M<sub>n-1</sub>)", namely, the totalized error M<sub>n-1</sub> is added

10 to the totalized value Db,n-1. Thereby, the data without any error before totalizing can be restored, and the calculation is performed on the basis of the value of the restored data.

Fig. 3 is a block diagram for illustrating the exemplary construction of the duplicate addition average value

15 calculating circuit 27 for calculating the black level value Db,n by performing the calculation of the equation (6). The duplicate addition average value calculating circuit 27 as shown in Fig. 3 is constructed with a multiplier 31, an adder 32, and a divider 33. The final black level value Db,n after  
20 the calculation of the duplicate addition average value

calculating circuit 27 is outputted from the divider 33. The black level value Db,n-1 on the last-time (n-1) lines outputted from the divider 33 and the totalized error M<sub>n-1</sub> at that time are outputted from the divider 33 and inputted to  
25 the multiplier 31.

The multiplier 31 multiplies the inputted value " $(D_{b,n-1} + M_{n-1})$ " by  $(A-1)$ . Thereby, the value " $(D_{b,n-1} + M_{n-1}) \times (A-1)$ " is obtained and outputted to the adder 32. The average value  $D_{opb,n}$  is inputted to the adder 32 from the average value calculating circuit 26. The average value  $D_{opb,n}$  is added to the value " $(D_{b,n-1} + M_{n-1}) \times (A-1)$ ", and the value  $\{D_{opb,n} + (D_{b,n-1} + M_{n-1}) \times (A-1)\}$  is obtained. The value thus obtained is outputted to the divider 33. The divider 33 divides " $\{D_{opb,n} + (D_{b,n-1} + M_{n-1}) \times (A-1)\}$ " by  $A$ , in order to obtain " $\{D_{opb,n} + (D_{b,n-1} + M_{n-1}) \times (A-1)\} / A$ ". At this time, the surplus ( $M_n$ ) less than the decimal fraction point obtained as the result of the division is treated with the rounding to the nearest whole number.

In such a way, since the duplicate addition average value calculating circuit 27 performs the totalizing treatment and the duplicate addition average value treatment, the following property of the black level value  $D_{b,n}$  can be secured in accordance with the variation of the average value of the output of the OPB portion of the respective lines.

In such situation, as shown in Fig. 6 (TABLE 1) showing the calculation example in which  $A$  is made equal to 4 ( $A = 4$ ) in such duplicate addition average value calculating circuit 27, it is apparent that, when the reference voltage of the A/D converter 22 is changed in accordance with the density of the image, four lines are multiplied until the data after the

duplicate addition follow, and regarding DO at the time of  
using Db, the density of the read-out image changes during  
this time period. Although this matter is not the thing to  
be noted in particular in the image quality mode of thinking  
5 much of the character, the matter is inevitably recognized as  
the step difference in the image quality mode of thinking  
much of the image density itself.

TABLE 1

ANALOG AMOUNT			DIGITAL AMOUNT					
Vref	Vin	Vopb	Din	Doph	Db	M	DO	
							AT THE TIME OF Dopb	AT THE TIME OF Db
1.65	1.5	0.1	232	15	15	0.455	217	217
1.65	1.5	0.1	232	15	15	0.341	217	217
1.65	1.5	0.1	232	15	15	0.256	217	217
1.65	1.5	0.1	232	15	15	0.192	217	217
1.65	1.5	0.1	232	15	15	0.144	217	217
1.98	1.8	0.1	232	13	15	-0.392	219	217
1.98	1.8	0.1	232	13	14	0.206	219	218
1.98	1.8	0.1	232	13	14	-0.096	219	218
1.98	1.8	0.1	232	13	14	-0.322	219	218
1.98	1.8	0.1	232	13	14	-0.491	219	218
1.98	1.8	0.1	232	13	13	0.382	219	219
1.98	1.8	0.1	232	13	13	0.286	219	219
1.98	1.8	0.1	232	13	13	0.215	219	219
1.98	1.8	0.1	232	13	13	0.161	219	219
1.98	1.8	0.1	232	13	13	0.121	219	219
1.98	1.8	0.1	232	13	13	0.091	219	219
1.98	1.8	0.1	232	13	13	0.068	219	219
1.98	1.8	0.1	232	13	13	0.051	219	219
1.98	1.8	0.1	232	13	13	0.038	219	219
1.98	1.8	0.1	232	13	13	0.029	219	219

In TABLE 1 (Fig. 6), the respective symbols represent

5 the matters as follows:

Vin: Signal of reading out the Background Level of the  
Original Document (Analog Value)

Vref: Reference Voltage of the A/D Converter

Vopb: Reading-out Voltage of the OPB Portion

5 Din: Image Data before the Black-shading Compensation

Dopb: Average Value of the OPB Portion per line

Db: Black Level Value obtained by the Equation (6)

DO: Image Data after the Black-shading Compensation

In such way, the black-shading compensation is performed

10 by use of the black level value (Db in TABLE 1) outputted  
from the duplicate addition average value calculating circuit  
27. As to the result thereof, refer to DO at the time of Db  
in TABLE 1 (Fig. 6). At this time, the occurrence of the  
image's transverse stripe caused by the noise is suppressed.

15 However, the following property of the black level value to  
the reference voltage of the A/D converter 22 changing in  
accordance with the image density becomes bad (unpreferable).  
That results in the unevenness of the image density. However,  
it is apparent from the TABLE 1 that, when the black-shading

20 compensation is performed by use of the black level value  
(Dopb in TABLE 1 - Fig. 6) outputted from the average value  
calculating circuit 26. The result of the black-shading  
compensation is DO at the time of Dopb in the TABLE 1 - Fig.  
6. It is apparent from the TABLE 1 (Fig. 6) that, since the

25 following property of the black level value to the reference

voltage of the A/D converter 22 is preferable, the density unevenness of the image can be suppressed. Nevertheless, the transverse stripe is apt to occur on the image due to the noise on this occasion.

5        Here, in such image reading-out apparatus 1, the control signal MODE is outputted to the selection circuit 28 from the microcomputer 30 serving as the control member in accordance with the image processing mode performed by the image processing section in the subsequent stage of the black-  
10        shading compensation circuit 24. The image reading-out apparatus 1 selects a suitable one of the black level signal outputted by the average value calculating circuit 26 and the black level signal outputted by the duplicate addition average value calculating circuit 27. The selected signal is  
15        outputted to the subtracter 29.

To state concretely, when the image processing mode performed in the image processing section 12 is the mode in which the image recording (imaging) is thought much thereof and the MTF compensation (first processing), etc. becomes a  
20        little strong mode, the influence of the noise in the image data is apt to be amplified. Therefore, even though the black level value Db outputted from the duplicate addition average value calculating circuit 27 is employed and the following property of the black level value to the reference  
25        voltage of the A/D converter 22 is sacrificed, the transverse



stripe occurring on the image due to the noise can be suppressed.

Furthermore, when the mode of the image processing performed in the image processing section 12 is the mode of thinking much of the density reproduction (restoring) and performing the smoothing process (second processing), since the image processing is not apt to be affected by the noise contained in the image data, the black level value Dopb outputted from the average value calculating circuit 26 is employed and the density unevenness of the image is suppressed.

In such a way, the black level signal employed for the black shading compensation is used property in accordance with the mode of the image processing performed in the image processing section 12, and thereby it is possible to intend to realize a high-quality image.

Moreover, in the embodiment of the present invention, an example of realizing the respective circuits constructing the invention with the hardware has been described heretofore. However, it may be possible to realize all of or a part of the circuit with the software.

Furthermore, although an example of a flat bed scanner has been described in the embodiment, the present invention can be applied to a handy scanner or other(s).

Fig. 4 is a block diagram for illustrating the outlined

structure of a copying machine which is a second embodiment of the present invention. The copying machine 41 is provided with the aforementioned image reading-out apparatus 1 and an image forming apparatus 42 for performing the image formation on the basis of the image acquired in the image reading-out apparatus 1.

A laser system performing the image formation with the electrophotographic method or other various sorts of the image forming method can be used in the image forming apparatus 42.

Even in the copying machine 41, the high-quality image can be intended to realize, as in the case of the first embodiment of the present invention.

Fig. 5 is a block diagram for illustrating the outlined structure of a facsimile device which is a third embodiment of the present invention. The facsimile device 51 is provided with the aforementioned image reading-out apparatus 1, a data transmitting/receiving apparatus 53 for transmitting the image data acquired in the image reading-out apparatus 1 to the network 52 such as the telephone circuit and receiving the image data from the network 52, and an image forming apparatus 54 performing the image formation on the basis of the image data received by the data transmitting/receiving apparatus.

In the image forming apparatus 54, the laser system

performing the image formation with the electrophotographic method or the other various sorts of the image forming method can be used. Even in the facsimile device 51, the high quality image can be intended to realize, as in the cases of the first and second embodiments of the present invention.

Heretofore, the first, second, and third embodiments of the invention have been concretely described. In those embodiments, various advantageous functional effects can be attained.

The black-shading compensation in the first aspect of the invention can be performed by selecting the optimum value among the plural black levels obtained by the different unit sections. Consequently, the high-quality image can be realized.

In the image reading-out apparatus of the second aspect of the invention in connection with the first aspect, the black shading compensation is performed by selecting the optimum one among the plural black level values in accordance with the sort of the image processing performed after the black-shading compensation. Consequently, the high-quality image can be realized.

In the image reading-out apparatus of the third aspect of the invention in connection with the second aspect, the black level value calculated on the basis of the image data of one line inputted this time and the image data of one or

plural lines inputted until last time, is employed, and  
thereby the occurrence of the transverse stripe of the image  
can be simply prevented with low cost. Furthermore, the  
black level value calculated on the basis of only the image  
5 data of one line inputted this time, and thereby the  
occurrence of the density unevenness of the image can be  
suppressed. Consequently, the high-quality image can be  
realized.

In the image reading-out apparatus of the fourth aspect  
10 of the invention in connection with the third aspect, when  
the image processing is performed so as to amplify the  
comparative influence of the noise exerted on the image data,  
the occurrence of the transverse stripe of the image can be  
simply prevented with low cost. On the contrary, when the  
15 image processing is performed so as not to be apt to be  
comparatively affected by the noise on the image data, the  
occurrence of the density unevenness of the image can be  
suppressed. Consequently, the high-quality of the image can  
be realized.

20 In the image reading-out apparatus of the fifth aspect  
of the invention in connection with the fourth aspect, when  
the MTF compensation is performed so as to amplify the  
comparative influence of the noise exerted on the image data,  
the occurrence of the transverse stripe of the image can be  
25 simply prevented with low cost. Consequently, the high-

quality of the image can be realized.

In the image reading-out apparatus of the sixth aspect of the invention in connection with the fourth or fifth aspect, when the smoothing image processing is performed so as not to be apt to be comparatively affected by the noise on the image data, the occurrence of the density unevenness of the image can be also suppressed. Consequently, the high-quality image can be realized.

In the copying machine of the seventh aspect of the invention, the same advantageous functional effect as that of the first through sixth aspects can be realized.

In the facsimile device of the eighth aspect of the invention, the same advantageous functional effect as that of the first through six aspects can be realized.

The preferred embodiments of the present invention have been described heretofore. However, numerous additional modifications and variations of the present invention are possible in light of the above teachings. It is therefore to be understood that, within the scope of the appended claims, the present invention may be practice otherwise than as specifically described herein.

This application claims benefit of priority under 35 U.S.C 120 to Japanese Patent Application No. 11-259784 filled in the Japanese Patent Office on September 14, 1999, the entire contents of which are incorporated by reference.

**WHAT IS CLAIMED AS NEW AND IS DESIRED TO BE SECURED BY**  
**LETTERS PATENT OF THE UNITED STATES IS:**

1. An image reading-out apparatus for exposing and  
scanning an original document to read out an image on said  
5 original document and thereby obtaining image data,  
comprising:

a background level detecting circuit configured to  
detect said background level of said original document from  
said image data;

10 an analog-to-digital converter configured to remove an  
influence due to the color of said background on said  
original document from said image data and configured to  
perform the analog-to-digital conversion of said image data  
in accordance with said detected background level; and

15 a black-shading compensation circuit configured to  
perform black-shading compensation of said image data after  
said analog-to-digital conversion,

wherein said black-shading compensation circuit  
comprises:

20 plural black level values calculating circuits  
configured to respectively obtain, per each one line, black  
level values employed for said black-shading compensation  
from said image data by use of respective different  
calculation members;

25 a selection circuit configured to select and output

one black level value among plural sorts of the black level values outputted by said plural black level values calculating circuits; and

a subtracter configured to subtract said selected  
5 black level value from said image data after performing said analog-to-digital conversion and said black-shading compensation.

2. The image reading-out apparatus as defined in claim 1,  
10 further comprising:

a control member configured to perform the selection for said image data by use of said selection circuit in accordance with the sorts of the processing performed at a stage subsequent to that of said black-shading compensation  
15 circuit.

3. The image reading-out apparatus as defined in claim 2,  
wherein one of said plural black level values calculating circuits is a first calculation circuit which is  
20 configured to calculate said black level value on the basis of the image data per one line inputted this time and the image data per one or plural lines inputted until last time; and

wherein another one of said plural black level values  
25 calculating circuits is a second calculation circuit which is

configured to calculate said black level value only on the basis of the image data per one line inputted this time.

4. The image reading-out apparatus as defined in claim 3,

5 wherein the sorts of processings performed at the stage subsequent to that of said black-shading compensation circuit include first processing and second processing;

wherein the first processing is a processing of amplifying the influence exerted by the noise on said image data to a larger extent than the second processing;

10 wherein the second processing is a processing of being less apt to be affected by said noise than the first processing;

15 wherein, in the case of performing said first processing, said control member causes the black level from said first calculation circuit to be outputted from said selection circuit; and

20 wherein, in the case of performing said second processing, said control member causes the black level from said second calculation circuit to be outputted from said selection circuit.

5. The image reading-out apparatus as defined in claim 4,

wherein said first processing is an MTF compensation.



6. The image reading-out apparatus as defined in claim 4,  
wherein said second processing is a smoothing  
processing.

5 7. The image reading-out apparatus as defined in claim 5,  
wherein said second processing is a smoothing  
processing.

8. A copying machine comprising:  
10 an image reading-out apparatus for exposing and  
scanning an original document to read out an image on the  
original document and thereby obtaining image data; and  
an image forming apparatus for forming an image on  
the basis of the image data obtained by said image reading-  
15 out apparatus which comprises:  
a background level detecting circuit configured to  
detect said background level of said original document  
from said image data;  
an analog-to-digital converter configured to remove an  
20 influence due to the color of said background on said  
original document from said image data and configured to  
perform the analog-to-digital conversion of said image data  
in accordance with said detected background level; and  
a black-shading compensation circuit configured to  
25 perform black-shading compensation of said image data after

said analog-to-digital conversion,

wherein said black-shading compensation circuit  
comprises:

plural black level values calculating circuits  
5 configured to respectively obtain, per each one line, black  
level values employed for said black-shading compensation  
from said image data by use of respective different  
calculation members;

a selection circuit configured to select and output  
10 one black level value among plural sorts of the black level  
values outputted by said plural black level values  
calculating circuits; and

a subtracter configured to subtract said selected  
black level value from said image data after performing said  
15 analog-to-digital conversion and said black-shading  
compensation.

9. A facsimile device comprising:

an image reading-out apparatus for exposing and  
20 scanning an original document to read out an image on the  
original document and thereby obtaining image data;

a transmitting/receiving apparatus for transmitting  
the image data obtained by said image reading-out apparatus  
to a network and receiving the image data from said network;

25 and

an image forming apparatus for forming the image on the basis of the image data received by said transmitting/receiving apparatus,

wherein said image reading-out apparatus comprises:

5 a background level detecting circuit configured to detect said background level of said original document from said image data;

an analog-to-digital converter configured to remove an influence due to the color of said background on said original document from said image data and configured to perform the analog-to-digital conversion of said image data in accordance with said detected background level; and

10 a black-shading compensation circuit configured to perform black-shading compensation of said image data after said analog-to-digital conversion,

15 wherein said black-shading compensation circuit comprises:

plural black level values calculating circuits configured to respectively obtain, per each one line, black level values employed for said black-shading compensation from said image data by use of respective different calculation members;

20 a selection circuit configured to select and output one black level value among plural sorts of the black level values outputted by said plural black level values

calculating circuits; and

a subtracter configured to subtract said selected  
black level value from said image data after performing said  
analog-to-digital conversion and said black-shading  
5 compensation.

10. An image reading-out apparatus for exposing and  
scanning an original document to read out an image on said  
original document and thereby obtaining image data,

10 comprising:

background level detecting means for detecting  
said background level of said original document from said  
image data;

15 analog-to-digital conversion means for removing an  
influence due to the color of said background on said  
original document from said image data and performing the  
analog-to-digital conversion of said image data in accordance  
with said detected background level; and

20 black-shading compensation means for performing black-  
shading compensation of said image data after said analog-to-  
digital conversion,

wherein said black-shading compensation means  
comprises:

25 plural black level values calculating means for  
respectively obtaining, per each one line, black level values

employed for said black-shading compensation from said image data by use of respective different calculation members;

selection means for selecting and outputting one black level value among plural sorts of black level values outputted by said plural black level values calculating means; and

subtraction means for subtracting said selected black level value from said image data after said analog-to-digital conversion and performing said black-shading compensation.

11. The image reading-out apparatus as defined in claim 10, further comprising control means for performing the selection for said image data by use of said selection means in accordance with the sorts of the processing performed at a stage subsequent to that of said black-shading compensation means.

12. The image reading-out apparatus as defined in claim 11,

wherein one of said plural black level values calculating means is a first calculation means for calculating said black level value on the basis of the image data per one line inputted this time and the image data per one or plural lines inputted until last time; and

wherein another one of said plural black level values

calculating means is a second calculation means for  
calculating said black level value only on the basis of the  
image data per one line inputted this time.

5           13. The image reading-out apparatus as defined in claim  
12,

          wherein the sorts of processings performed at the  
stage subsequent to that of said black-shading compensation  
means include first processing and second processing;

10           wherein the first processing is a processing of  
amplifying the influence exerted by the noise on said image  
data to a larger extent than the second processing;

          wherein the second processing is a processing of being  
less apt to be affected by said noise than the first  
15   processing;

          wherein, in the case of performing said first  
processing, said control means causes the black level from  
said first calculation means to be outputted from said  
selection means; and

20           wherein, in the case of performing said second  
processing, said control means causes the black level from  
said second calculation means to be outputted from said  
selection means.

25           14. The image reading-out apparatus as defined in claim

13,

Wherein said first processing is an MTF compensation.

15. The image reading-out apparatus as defined in claim

5 13,

wherein said second processing is a smoothing processing.

16. The image reading-out apparatus as defined in claim

10 14,

wherein said second processing is a smoothing processing.

~~17.~~ A copying machine comprising:

15 an image reading-out apparatus for exposing and scanning an original document to read out an image on the original document and thereby obtaining image data: and

an image forming apparatus for forming an image on a basis of the image data obtained by said image reading-out apparatus which comprises:

background level detecting means for detecting said background level of said original document from said image data;

analog-to-digital conversion means for removing an influence due to the color of said background on said

original document from said image data and performing the analog-to-digital conversion of said image data in accordance with said detected background level; and

black-shading compensation means for performing black-shading compensation of said image data after said analog-to-digital conversion,

wherein said black-shading compensation means comprises:

plural black level values calculating means for respectively obtaining, per each one line, black level values employed for said black-shading compensation from said image data by use of respective different calculation members;

selection means for selecting and outputting one black level value among plural sorts of black level values outputted by said plural black level values calculating means; and

subtraction means for subtracting said selected black level value from said image data after said analog-to-digital conversion and performing said black-shading compensation.

18. A facsimile device comprising:

an image reading-out apparatus for exposing and scanning an original document to read out an image on the original document and thereby obtaining image data:

a transmitting/receiving apparatus for transmitting



the image data obtained by said image reading-out apparatus  
to a network and receiving the image data from said network;  
and

an image forming apparatus for forming the image on a  
basis of the image data received by said  
transmitting/receiving apparatus,

wherein said image reading-out apparatus comprises:

background level detecting means for detecting  
said background level of said original document from said  
image data;

analog-to-digital conversion means for removing an  
influence due to the color of said background on said  
original document from said image data and performing the  
analog-to-digital conversion of said image data in accordance  
with said detected background level; and

black-shading compensation means for performing black-  
shading compensation of said image data after said analog-to-  
digital conversion,

wherein said black-shading compensation means  
comprises:

plural black level values calculating means for  
respectively obtaining, per each one line, black level values  
employed for said black-shading compensation from said image  
data by use of respective different calculation members;

selection means for selecting and outputting one black

level value among plural sorts of black level values  
outputted by said plural black level values calculating  
means; and

subtraction means for subtracting said selected black  
level value from said image data after said analog-to-digital  
conversion and performing said black-shading compensation.

19. A method of reading out an image on an original  
document by exposing and scanning said original document and  
thereby obtaining image data comprising:

detecting the background level of said original  
document from said image data;

removing an influence due to the color of the  
background on said original document from said image data;

performing the analog-to-digital conversion of said  
image data in accordance with said detected background level;  
and

performing black-shading compensation of said image  
data after said analog-to-digital conversion.

20. The method of reading out the image on the original  
document as defined in claim 19,

wherein said black-shading compensation comprises;

respectively obtaining, per each one line, plural

black level values employed for said black-shading

compensation from said image data by use of respective  
different calculation members;

selecting and outputting one black level value among  
plural sorts of black level values outputted by the plural

5 black level values calculating members; and

subtracting said selected black level value from said  
image data after said analog-to-digital conversion and  
performing said black-shading compensarion.

10 21. The method of reading out the image on the original  
document as defined in claim 19, further comprising:

performing the selection for said image data by use of  
the selection circuit in accordance with the sorts of the  
processing performed at the stage subsequent to that of said  
15 black-shading compensation member.

22. The method of reading out the image on the original  
document as defined in claim 20, further comprising:

performing the selection for said image data by use of  
20 the selection circuit in accordance with the sorts of the  
processing performed at the stage subsequent to that of said  
black-shading compensation member.

23. The method of reading out the image on the original  
25 document as defined in claim 21,

wherein one of said plural black level values  
calculating steps is the first calculation step of  
calculating said black level value on the basis of the image  
data per one line inputted this time and the image data per  
5 one or plural lines inputted until last time; and

wherein another one of said plural black level values  
calculating steps is the second calculation step of  
calculating said black level value only on the basis of the  
image data per one line inputted this time.

10 24. The method of reading out the image on the original  
document as defined in claim 22,

wherein one of said plural black level values  
calculating steps is a first calculation step of calculating  
15 said black level value on the basis of the image data per one  
line inputted this time and the image data per one or plural  
lines inputted until last time; and

wherein another one of said plural black level values  
calculating steps is a second calculation step of calculating  
20 said black level value only on the basis of the image data  
per one line inputted this time.

25 25. The method of reading out the image on the original  
document as defined on claim 23,

wherein the steps of processings performed at the

stage subsequent to that of said black-shading compensation member include first processing and second processing;

wherein the first processing is a processing of amplifying the influence exerted by the noise on said image data to a larger extent than the second processing;

wherein the second processing is a processing being less apt to be affected by said noise than the first processing;

wherein, in the case of performing said first processing, said control member causes the black level from said first calculation member to be outputted from said selection member; and

wherein, in the case of performing said second processing, said control member causes the black level from said second calculation member to be outputted from said selection member.

26. The method of reading out the image on the original document as defined on claim 24,

wherein the steps of processings performed at a stage subsequent to that of said black-shading compensation member include first processing and second processing;

wherein the first processing is a processing of amplifying the influence exerted by the noise on said image data to a larger extent than the second processing;

wherein the second processing is a processing being less apt to be affected by said noise than the first processing;

wherein, in the case of performing said first processing, said control member causes the black level from said first calculation member to be outputted from said selection member; and

wherein, in the case of performing said second processing, said control member causes the black level from said second calculation member to be outputted from said selection member.

27. The method of reading out the image on the original document as defined in claim 25,

wherein said first processing is an MTF compensation.

28. The method of reading out the image on the original document as defined in claim 26,

wherein said first processing is an MTF compensation.

29. The method of reading out the image on the original document as defined in claim 25,

wherein said second processing is a smoothing processing.

30. The method of reading out the image on the original document as defined in claim 26,

wherein said second processing is a smoothing processing.

5

31. The method of reading out the image on the original document as defined in claim 27,

wherein said second processing is a smoothing processing.

10

32. The method of reading out the image on the original document as defined in claim 28,

wherein said second processing is a smoothing processing.

15

~~33.~~ A method of copying an image on an original document by exposing and scanning said original document and thereby obtaining image data, comprising:

detecting the background level of said original document from said image data;

removing an influence due to the color of the background on said original document from said image data;

performing the analog-to-digital conversion of said image data in accordance with said detected background level;

25 and

performing black-shading compensation of said image data after said analog-to-digital conversion; and

forming an image on the basis of the image data.

5        34. A method of exchanging an image data by use of a facsimile device in which an image on an original document is read by exposing and scanning said original document and thereby obtaining image data, comprising:

10        detecting the background level of said original document from said image data;

removing an influence due to the color of the background on said original document from said image data;

performing the analog-to-digital conversion of said image data in accordance with said detected background level;

15        performing black-shading compensation of said image data after said analog-to-digital conversion;

transmitting the image data obtained by said image reading-out apparatus to a network and receiving the image data from said network; and

20        forming the image on the basis of the received image data.



**ABSTRACT OF THE DISCLOSURE**

An image reading-out apparatus including a background level detecting circuit, an analog-to-digital converter, and a black-shading compensation circuit. The background level  
5 detecting circuit is configured to detect the background level of the original document from the image data. The analog-to-digital converter is configured to remove an influence due to the color of the background on the original document from the image data and configured to perform the  
10 analog-to-digital conversion of the image data in accordance with the detected background level. The black-shading compensation circuit is configured to perform black-shading compensation of the image data after the analog-to-digital conversion. The black-shading compensation circuit includes  
15 plural black level values calculating circuits which are configured to respectively obtain, per each one line, black level values employed for the black-shading compensation from the image data by use of respective different calculation members; a selection circuit which is configured to select  
20 and output one black level value among plural sorts of the black level values outputted by the plural black level values calculating circuits; and a subtracter which is configured to subtract the selected black level value from the image data after performing the analog-to-digital conversion and the  
25 black-shading compensation.

Docket No. 197193US2

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

IN RE APPLICATION OF: Wataru NARA

FILING DATE: Herewith

FOR: IMAGE READING-OUT APPARATUS, COPYING MACHINE AND FACSIMILE DEVICE  
UTILIZING THE SAME, AND METHOD OF READING OUT IMAGE

**LIST OF INVENTORS' NAMES AND ADDRESSES**

ASSISTANT COMMISSIONER FOR PATENTS  
WASHINGTON, D.C. 20231

SIR:

Listed below are the names and addresses of the inventors for the above-identified patent application.


Wataru NARA

Kawasaki-shi, Japan

A declaration containing all the necessary information will be submitted at a later date.

Respectfully Submitted,

OBLON, SPIVAK, McCLELLAND,  
MAIER & NEUSTADT, P.C.



Gregory J. Maier

Registration No. 25,599

**Eckhard H. Kuesters**  
Registration No. 28,870

22850



**22850**

Tel. (703) 413-3000  
Fax. (703) 413-2220  
(OSMMN 11/98)

FIG. 1

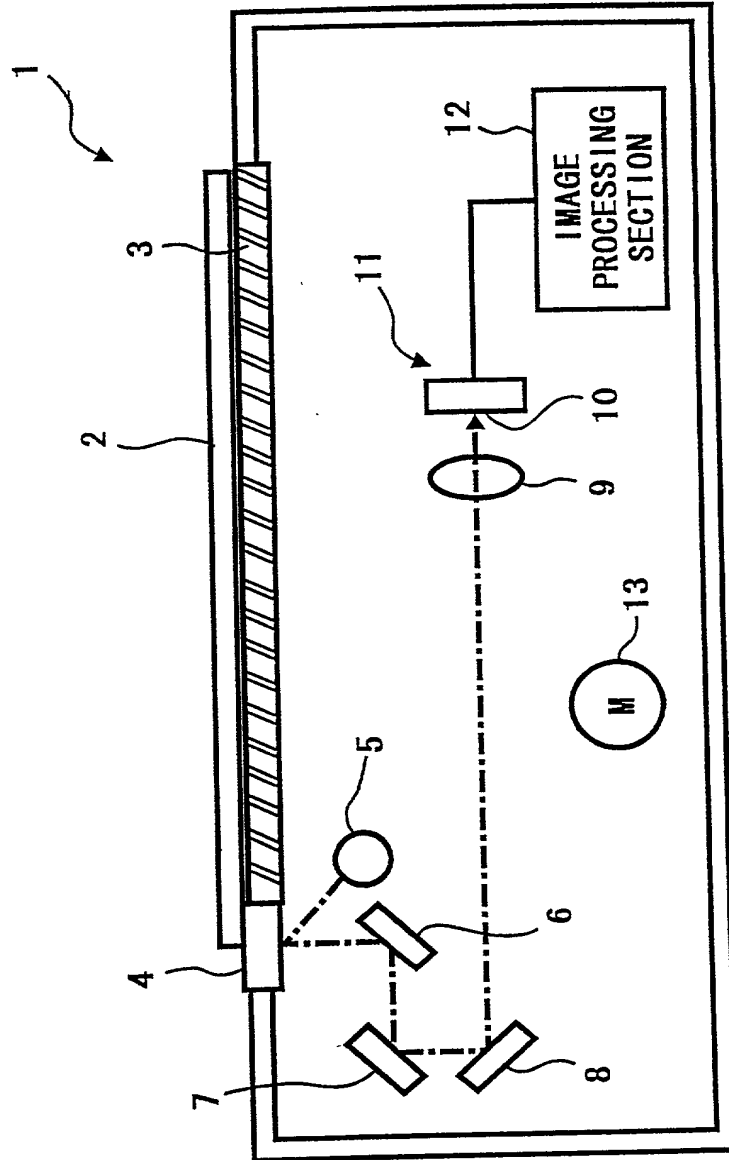


FIG. 2

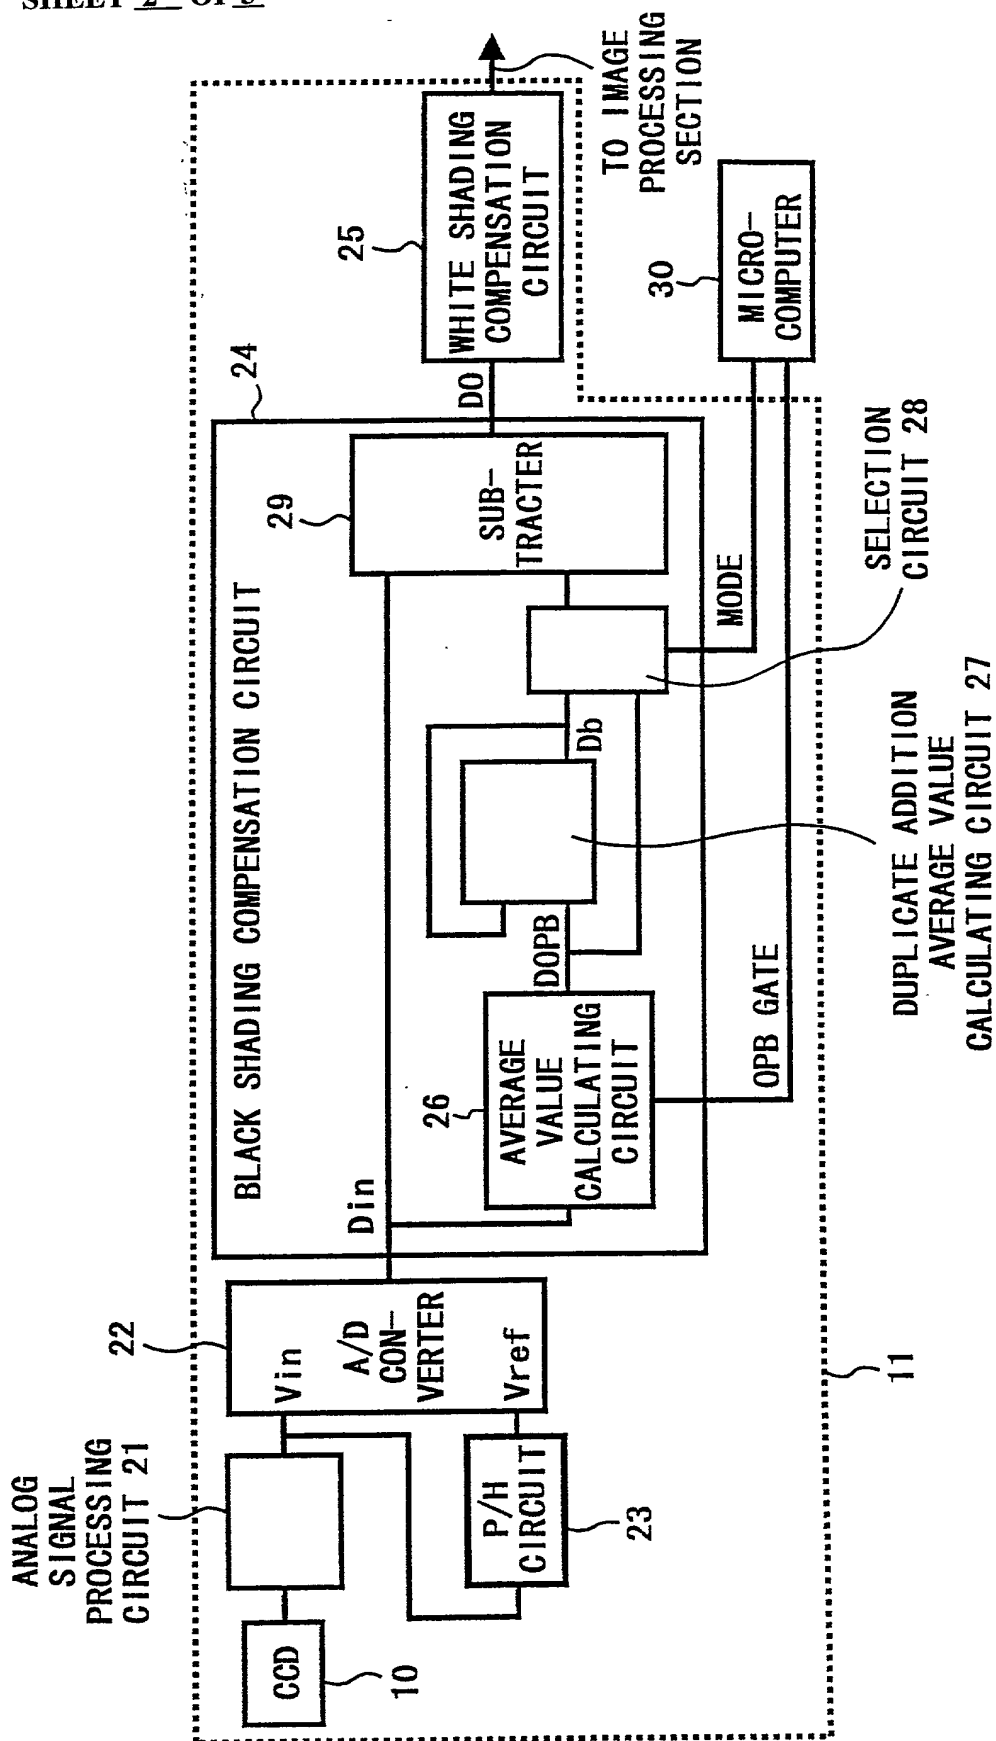


FIG. 3

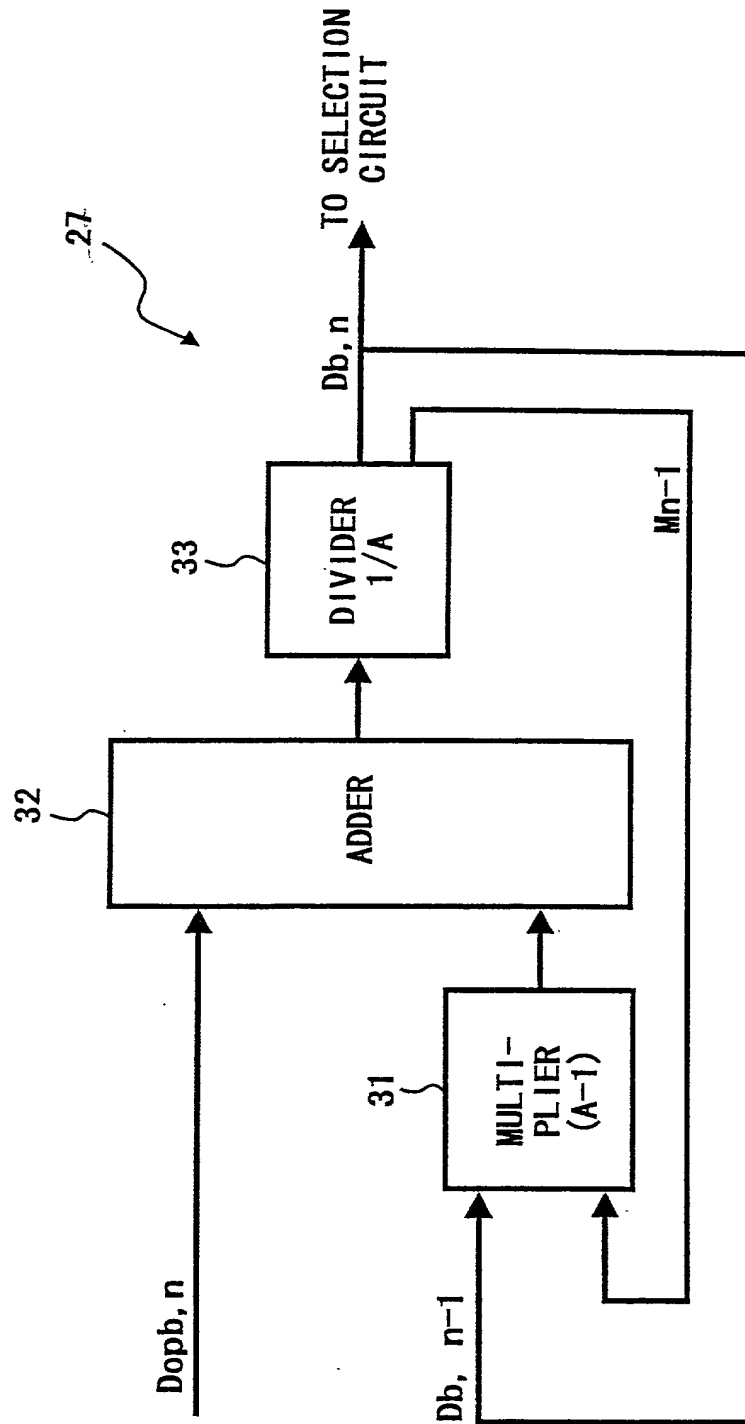


FIG. 4

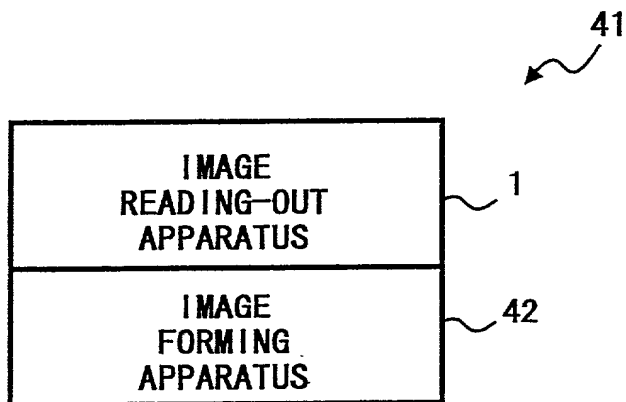


FIG. 5

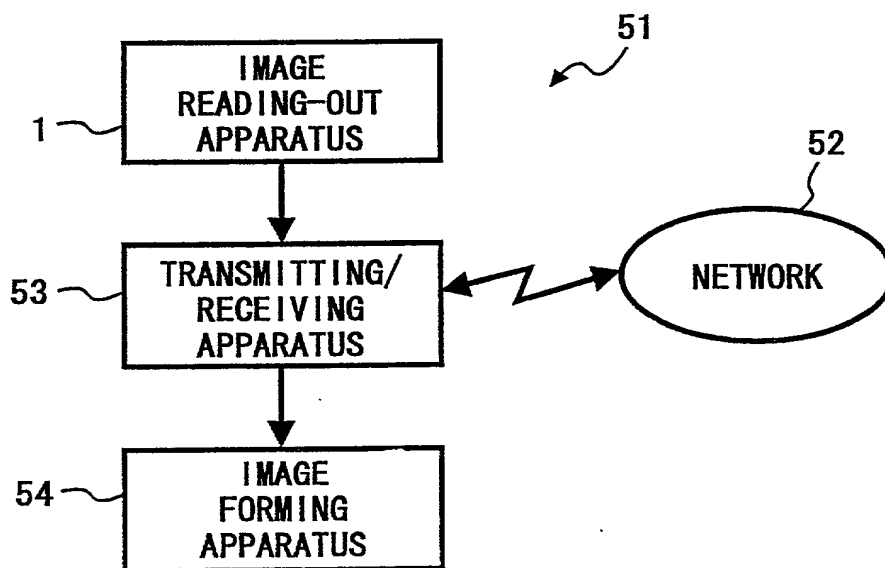


FIG. 6

ANALOG AMOUNT			DIGITAL AMOUNT					
Vref	Vin	Voph	Din	Doph	Db	M	Do	AT THE TIME OF Db
1.65	1.5	0.1	232	15	15	0.455	217	217
1.65	1.5	0.1	232	15	15	0.341	217	217
1.65	1.5	0.1	232	15	15	0.256	217	217
1.65	1.5	0.1	232	15	15	0.192	217	217
1.65	1.5	0.1	232	15	15	0.144	217	217
1.98	1.8	0.1	232	13	15	-0.392	219	217
1.98	1.8	0.1	232	13	14	0.206	219	218
1.98	1.8	0.1	232	13	14	-0.096	219	218
1.98	1.8	0.1	232	13	14	-0.322	219	218
1.98	1.8	0.1	232	13	14	-0.491	219	218
1.98	1.8	0.1	232	13	13	0.382	219	219
1.98	1.8	0.1	232	13	13	0.286	219	219
1.98	1.8	0.1	232	13	13	0.215	219	219
1.98	1.8	0.1	232	13	13	0.161	219	219
1.98	1.8	0.1	232	13	13	0.121	219	219
1.98	1.8	0.1	232	13	13	0.091	219	219
1.98	1.8	0.1	232	13	13	0.068	219	219
1.98	1.8	0.1	232	13	13	0.051	219	219
1.98	1.8	0.1	232	13	13	0.038	219	219
1.98	1.8	0.1	232	13	13	0.029	219	219